


T4091-□P(PA16)



定格 Rating	AC500V 76A
適合電線 Applicable Wire	16mm ²
本体材質 Body Material	PA66
連接方式 Connection	M4 Screw-M4 Screw

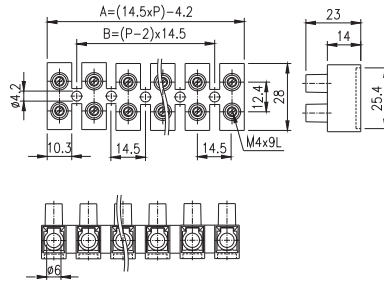


極數 P	1	2	3	4	5	6	7	8	9	10	11	12
全長 A	10.3	24.8	39.3	53.8	68.3	82.5	97.3	111.8	126.3	140.8	155.3	169.8

T4051S-□P(2000DS)



定格 Rating	VDE0100: 82A VDE0700: 40A
適合電線 Applicable Wire	10mm ²
本体材質 Body Material	PA 66
連接方式 Connection	M5 Screw-M5 Screw

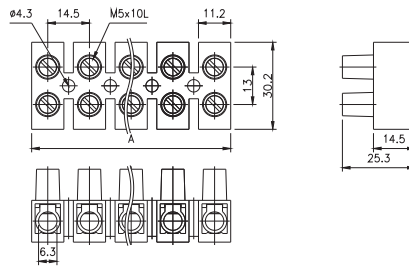


極數 P	1	2	3	4	5	6	7	8	9	10	11	12
全長 A	11.2	25.7	40.2	54.7	69.2	83.7	98.2	112.7	127.2	141.7	156.2	170.7

T4067-□P(PA18)




定格 Rating	AC500V 100A
適合電線 Applicable Wire	25mm ²
本体材質 Body Material	PA 66
連接方式 Connection	M5 Screw-M5 Screw

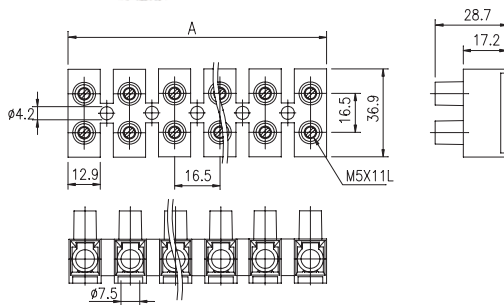

極數 P	1	2	3	4	5	6	7	8	9	10	11	12
全長 A	12.9	29.4	45.9	62.4	78.9	95.4	111.9	128.4	144.9	161.4	177.9	194.4

T4086-□P(PA12)

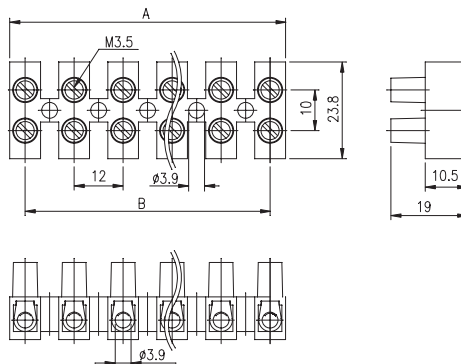

定格 Rating	UL 600V 35A VDE 400V 41A
適合電線 Applicable Wire	5.5mm ²
本体材質 Body Material	PA 66
連接方式 Connection	M3.5 Screw-M3.5 Screw

極數 P	1	2	3	4	5	6	7	8	9	10	11	12
全長 A	7.6	19.7	31.8	43.9	56.0	68.1	80.2	92.3	104.4	116.5	128.6	140.7